



Page 1 of 4


used plastic hammer insert all (3) and (4) into (1) and use (N) to tighten in (3)

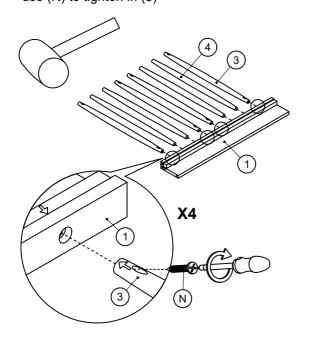


used plastic hammer insert 2 into (3) and (4) and use (N) to tighten in (3)



knock the Item(F) wood dowel into the (10)&(11)&(1) hole.

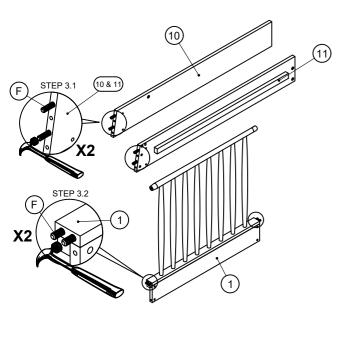

Insert (P) on (D) tighten them with (K) and Insert (P) on (A)tighten them with K in the relative positions according to the figure.

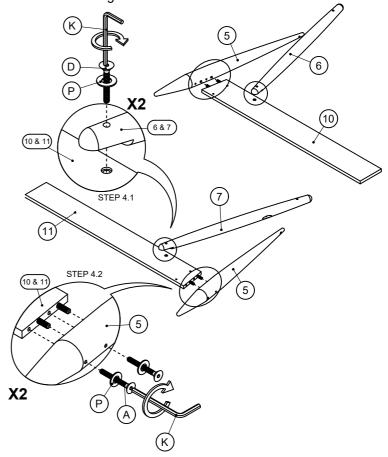


Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

(DO NOT FULLY TIGHTEN ALL OF JCBC)

Page 2 of 4

Insert (Q) AND (O) on (C) then tighten them with (K) the relative positions according to the figure.

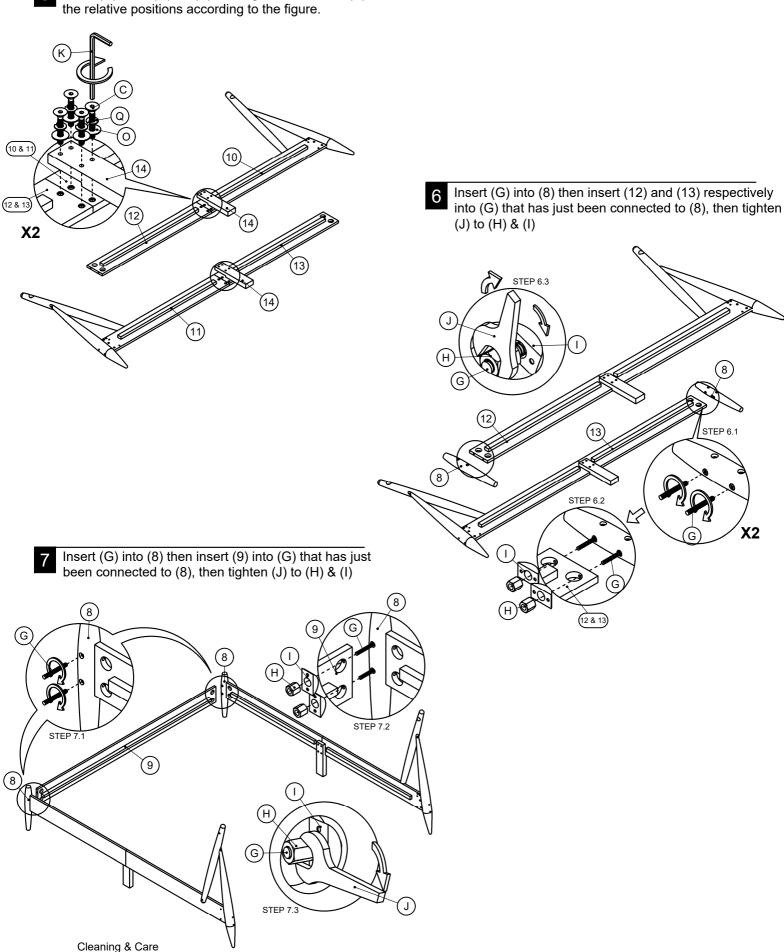

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

(DO NOT FULLY TIGHTEN ALL OF JCBC)

Page 3 of 4

8 Insert (E) to (1) then insert (P) to (B) Then use (K) to tighten them relative positions according to the figure. used (M) tighten into (5)

6 & 7

**X2** 

